
Panasonic



Panasonic

Cell Type BK-3HCDE

To PECE

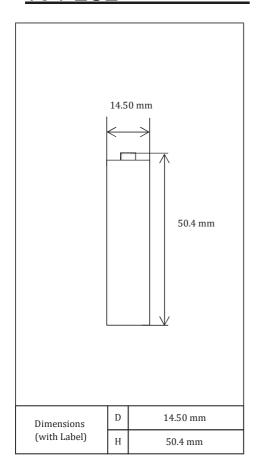

Specifications

Type : Nickel-Metal Hydride Battery			Size : AA Consumer Type
Country of origin			Japan
Capacity 1)	Minimum		2500mAh
Nominal Voltage			1.2V
Charging Current x Time		Fast Charge 2)	1250mA X 2.2h
Ambient Temp.	Charge Condition	Fast Charge 2)	0°C - 40°C
	Discharge Condition		0°C - 50°C
	Storage Condition	Less than 90days	-20°C - 40°C
		Less than 1year	-20°C - 35°C
Internal Impedance 3) (after discharge to E.V.=1.0V)			Approx. 40m Ω (at 1KHz)
Weight 4)			Approx. 30 g
Size 4):(Diameter) x (Height)			φ:14.5mm X H:50.4mm

¹⁾ Single cell capacity under the following condition. Charge: 250mA x 16h, Discharge: 500mA (E.V.

^{=1.0}V) at 25deg.C


²⁾ Use recommended charging system.

³⁾ After a few charge and discharge cycles under the above 1) condition. 4) With Label.

Panasonic



Charge Characteristics

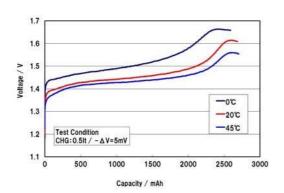

Discharge Characteristics

