


Cell Specifications:


Nominal Voltage		1.2V	
Capacity		0.2C Discharge	1C Discharge
	Minimum	290min	56min
	Typical	300min	58min
Dimensions	Diameter	14.5 ^{±0.7}	mm
	Height	28.0 ^{±1.0}	mm
Weight (approximately)		11.6	g
Internal Impedance at 1000Hz		30mΩ (max)	
Charge	Standard	60mA (0.1C) x 16hrs	
	Rapid	600mA (1.0C) x 1.2hrs	
Ambient Temperature	Charge	Standard	0 – 45 °C
		Rapid	0 – 40 °C
	Discharge	-40 – 60 °C	
	Storage	-40 – 40 °C	

Typical Characteristics:


Standard Charge:

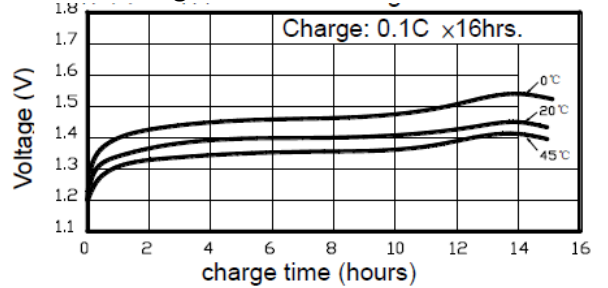


Rapid Charge:

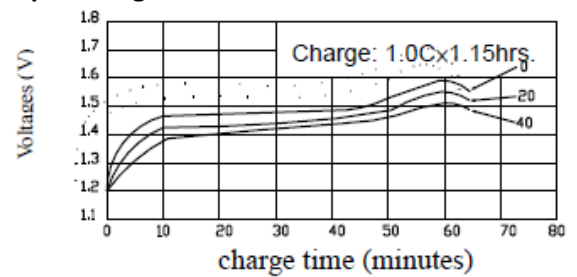

Discharge Characteristics:

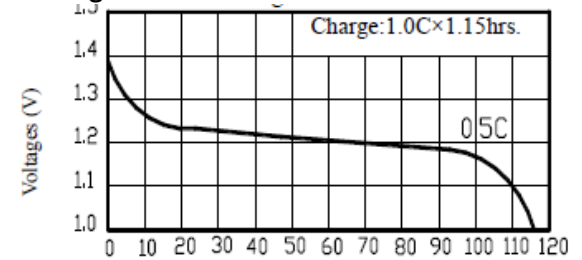


Dimensions with PVC tube (mm):

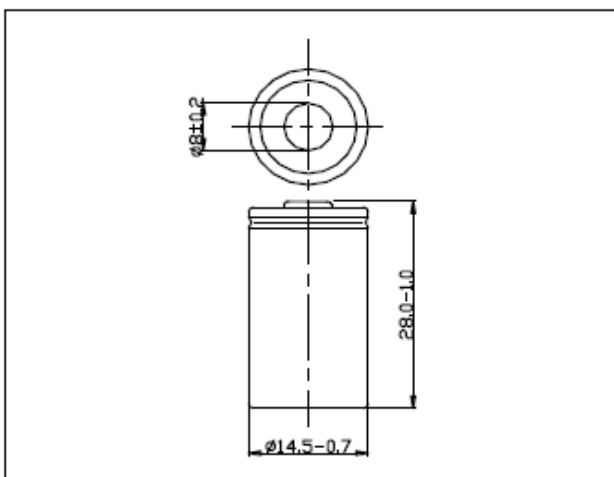


Please note:

- 1) Nominal capacity is rated at 0.2C 20°C.
- 2) Weight for reference.
- 3) Standard according as IEC of test cycle life.

Cycle Life Characteristics:

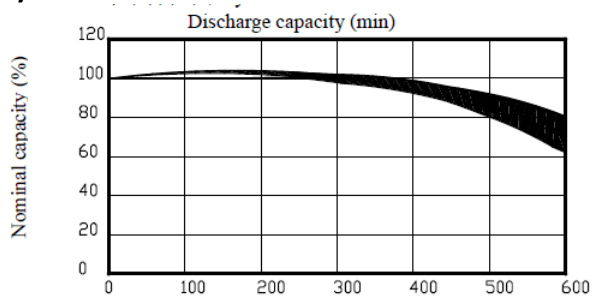

Charge Retention:

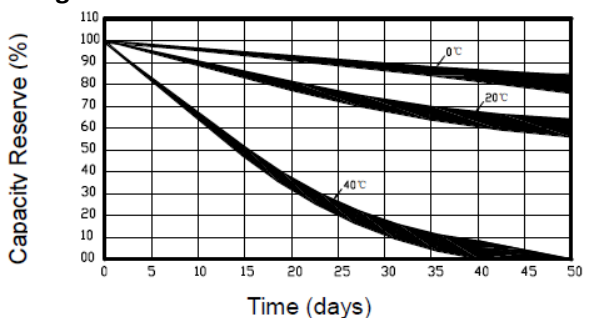



1. PREFACE

The specification is suitable for the performance of NI-MH rechargeable battery

2. MODEL

2/3AA 600mAh 1.2V

3. APPEARANCE

There shall be no such details as discoloration or electrolyte leakage or 0 voltage.

4. RATINGS

Description	Unit	Specification	Condition
Nominal Voltage	V	1.2	Unit cell
Typical Capacity	min	58	Discharge at 1.0C to 1.0V
Nominal Capacity	mAh	600	Standard Charge/Discharge
Minimum Capacity	min	56	Discharge at 1.0C to 1.0V
Standard Charge	mA	60(0.1C)	Ta=0~40°C (see note 1)
	hour	16	
Fast Charge	mA	120(0.2C)~600(1.0C) with charge termination control	-ΔV=10mV/ cell Timer cutoff=105%input capacity Temp. cutoff=50~55°C dT/dt=0.8°C/min(0.5 to 1.0C); 0.8~1°C/min(1C)
	hour	6.5 approx.(0.2C) 1.15 approx(1.0C)	
Trickle Charge	mA	12(0.02C)~30(0.05C)	Ta=0~40°C (see note 1)
Storage Temperature	°C	-20~+25(within 1 year) -20~+30(within 3 month) -20~+40(within 1 month) -20~+50(within 1 week)	*
Typical Weight	g	11.6 approx	*

5. PERFORMANCE

Before proceeding the following tests, the cells should be discharged at 0.2C to 1.0V cut-off. Unless otherwise stated, tests should be done within one month of delivery under the following conditions:



Ambient temperature: 20°C ±5°C

Relative Humidity: 65±20%

Note Standard Charge/Discharge Conditions:

Charge: 30 mA(0.1C)×15hrs

Discharge: 60mA(0.2C) to 1.0V/cell

Test	Unit	Specification	Condition	Remarks
Capacity	min	≥290	Discharge at 0.2C to 1.0V	Up to 3 cycles are allowed
Open circuit Voltage (OCV)	V	≥1.25	Within 1 hr after standard charge	Unit cell
Internal Impedance (Ri)	mΩ	≤80	Upon fully charge at 1kHz	*
Low Temperature Discharge	min	≥270	Standard Charge, Storage:24hrs at 0±2°C 0.2C discharge at 0±2°C	1.0V/cell Cut-off
Overcharge	N/A	No conspicuous deformation and/or leakage	0.1C charge for 28 days	*
Charge reserve	min	≥180	Standard charge Storage: 28 days Standard discharge (0.2C)	1.0V/cell Cut-off
IEC Cycle Life Test	Cycle	≥500	IEC61951-2(2003)7.4.1.1	*
Humidity	N/A	No leakage	Standard charged, stand for 14 days at 33±3°C and 80±5% of relative humidity	*
External Short Circuit	N/A	No fire and no explosion	After standard charge, short-circuit the cell at 20°C±5°C until the cell temperature returns to ambient temperature.(cross section of the wire or connector should be more than 0.75mm ²)	*
Safety Device Operation	N/A	No explosion	Forced discharge at 0.2C to a final voltage of 0V,then the current be increased to 1C and forced discharge continue for 60 min	Leakage of electrolyte and Deformation are acceptable
Free falling (drop)	N/A	ΔV<0.02V/cell ΔRi<5%/cell	Charge at 0.1C for 16hrs,and then leave for 24hrs,check battery before / after drop Height: 50 cm Thickness of wooden board: 30mm Direction is not specified Test for 3 times	*



Notes:

- 1) Ta: Ambient Temperature
- 2) Approximate charge time from discharged state, for reference only.
- 3) Please activate the battery once every 3 months according to the following method:
Charge at 0.1C for 15 hrs, rest 10 min, then discharge with 0.2C to 1.0V/cell, rest 10 min, then charge at 0.2C to 150min.

6. PRECAUTIONS TO ENSURE THE SAFETY ON BANDING BATTERY

1. Batteries should be charged prior to use.
2. When using a new battery for the first time or after long term storage, please fully charge the battery before
3. use.
4. For charging methods please reference to our technical handbook.
5. Use the correct charger for Ni-Cd or Ni-MH batteries.
6. Do not reverse charge batteries.
7. Do not short circuit batteries, permanent damage to batteries may result.
8. Do not incinerate or mutilate batteries, may burst or release toxic material.
9. Do not solder directly to cells or batteries.
10. Do not subject batteries to adverse condition such as extreme temperature, deep cycling and excessive overcharge/overdischarge.
11. Store batteries in a cool dry place.
12. Do not mix VB power batteries with other battery brands or batteries of a different chemistry such as alkaline and zinc carbon.
13. Do not mix new batteries in use with semi-used batteries, overdischarge may occur.
14. Avoid batteries being used in an airtight compartment. Ventilation should be provided inside the battery compartment; otherwise batteries may generate hydrogen gas, which could cause an explosion if exposed to an ignition source.
15. When connecting a battery pack to a charger, ensure correct polarity.
16. If find any noise, excessive temperature or leakage from a battery, please stop its use.
17. When the battery is hot, please do not touch it and handle it, until it has cooled down.
18. Do not remove the outer sleeve from a battery pack nor cut into its housing.
19. When find battery power down during use, please switch off the device to avoid overdischarge.
20. When not using a battery, disconnect it from the device.
21. Unplug a battery by holding the connector itself and not by pulling at its cord.
22. After use, if the battery is hot, before recharging it, allow it to cool in a well-ventilated place out of direct sunlight.
23. Never put a battery into water or seawater.
24. During long term storage, battery should be charged and discharged once every half a year.
25. Do not attempt to take batteries apart or subject them to pressure or impact. Heat may be generated or fire may result. The alkaline electrolyte is harmful to eyes and skin, and it may damage clothing upon contact.
26. Keep away from children. If swallowed, contact a physician at once.



7. APPENDIX: IEC61951 4.4 Endurance in cycles

Before the endurance in cycles test, the cell shall be discharged at 0.2 I_t A to a final voltage of 1.0V/cell.

The following endurance test shall then be carried out, irrespective of cell designation, in an ambient temperature of $20^{\circ}\text{C} \pm 5^{\circ}\text{C}$. Charge and discharge shall be carried out at constant current throughout, using the conditions specified in table 5. Precautions shall be taken to prevent the cell-case temperature from rising above 35°C during the test, by providing a forced air draught if necessary.

NOTE: Actual cell temperature, not the ambient temperature, determines cell performance.

Table 5-Endurance in cycles

Cycle number	Charge	Stand in Charged condition	Discharge
1	0.1 C_t A for 16 h	None	0.25 C_t A for 2 h 20 min ²⁾
2 to 48	0.25 C_t A for 3 h 10 min	None	0.25 C_t A for 2 h 20 min ²⁾
49	0.25 C_t A for 3 h 10 min	None	0.25 C_t A to 1.0V/cell
50	0.1 C_t A for 16 h	1h to 4h	0.2 C_5 A to 1.0V/cell
It is permissible to allow sufficient open-circuit rest time after the completion of discharge at cycle 50, so as to start cycle 51 at an exact two-week interval. A similar procedure may be adopted at cycles 100,150,200,250,300,350,400 and 450. If cell discharge voltage drops below 1.0V/cell, discharge may be discontinued.			

Cycles 1 to 50 shall be repeated until the discharge duration on any 50th cycle becomes less than 3h at this stage, a further cycle as specified for cycle 50 shall be carried out.

The endurance test is considered complete when two such successive cycles give a discharge duration less than 3h. The number of cycles obtained when the test is completed shall be not less than 500.